
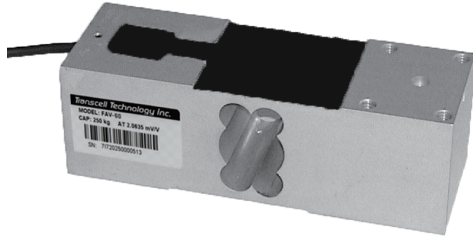


Single Point




Capacities

50kg, 75kg, 100kg, 150kg, 200kg, 250kg, 300kg, 500kg, 635kg

Features

- Aluminum Construction
- IP66 protection
- Available with Metric and UNC threads

Maximum platform: 600 × 600mm

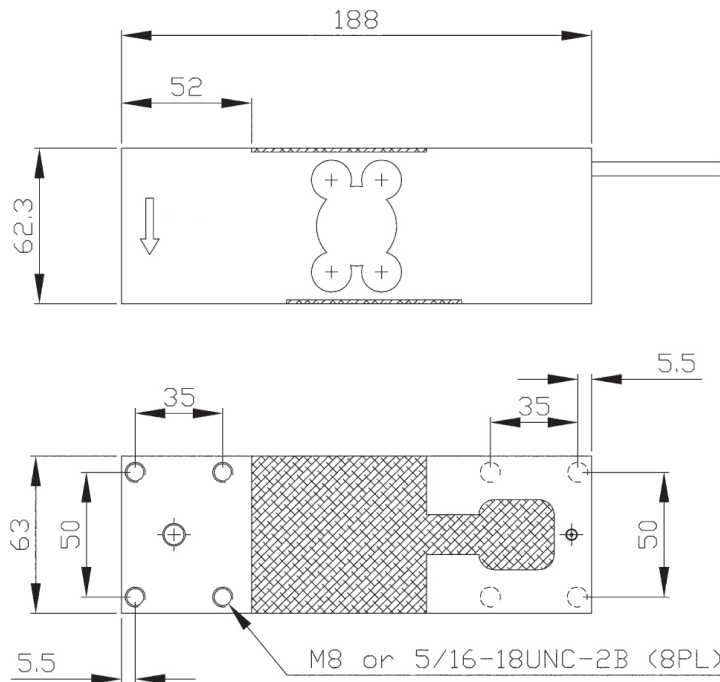

Specifications

Y=Emax/vmin	3000	5400	12000	Break Load	>300% of R.C.
Z=Emax/(2*DR)	2000	2500	3000	Nominal Excitation	10V
Temp. Effect On Output	±0.014%/10°C	±0.010%/10°C	±0.010%/10°C	Max. Excitation	15V
Sensitivity	2.0mV			Compensation Circuit Type	Balanced Bridge
Zero Balance	±0.10mV/V			Input Impedance	408 Ohm ± 15 Ohm
Sensitivity Tolerance	±0.20mV/V			Output Impedance	350 Ohm ± 3 Ohm
Eccentric Loading Error	0.0057±%/cm			Insulation Resistance	> 2000 M ohm (50V DC)
Nominal Temp. Range	-10 to +45°C			Cable Length	3.0m
Service Temp. Range	-30 to +70°C			Cable Type	4x26 AWG, Black PVC Jacket
Limit Load	> 150% of R.C.			Color Code	Red(+S) Black(-E) White(-S) Green(+E)